

# Download Instructions

**Nurit 2085, 2090, 3000, 3010, 3020, 8320**



**To perform a compliance update:**




Please adjust tips if applicable and settle any open batch in the terminal to avoid deleting transactions. If you are using the Nurit 2090, 3000, or 3010 Mobitex wireless units, please connect an analog phone line to the port labeled "Line."




If you are unsuccessful with your download, or have questions about these instructions, please contact us by calling 1-888.804.4222, and selecting the terminal help desk options.


**1. From the idle screen that reads "Credit.....Sale Account," press the "Menu/Esc" key to access the menu in the lower left hand corner.**

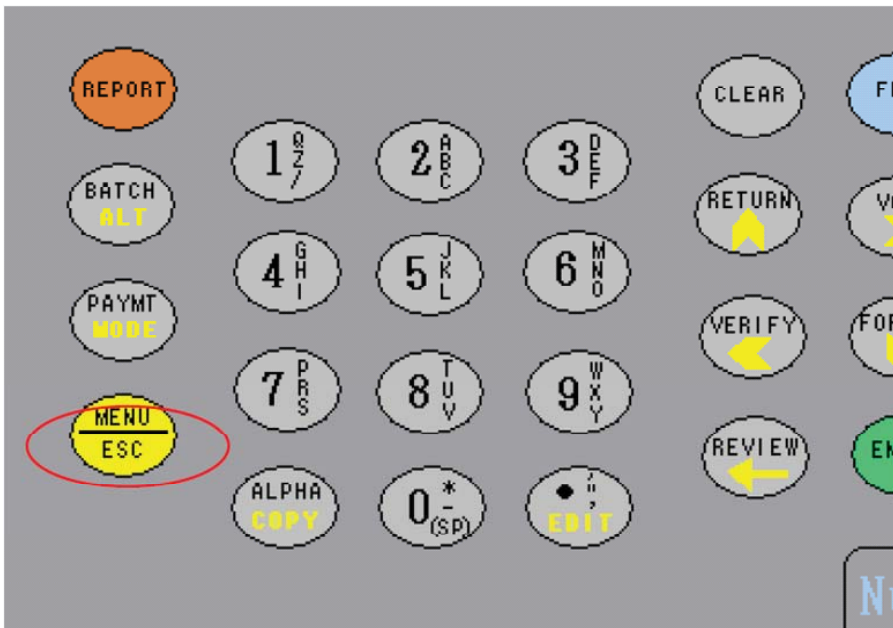


**2. Terminal will display a menu screen. Press the "7" key to select option 7 for Download.**

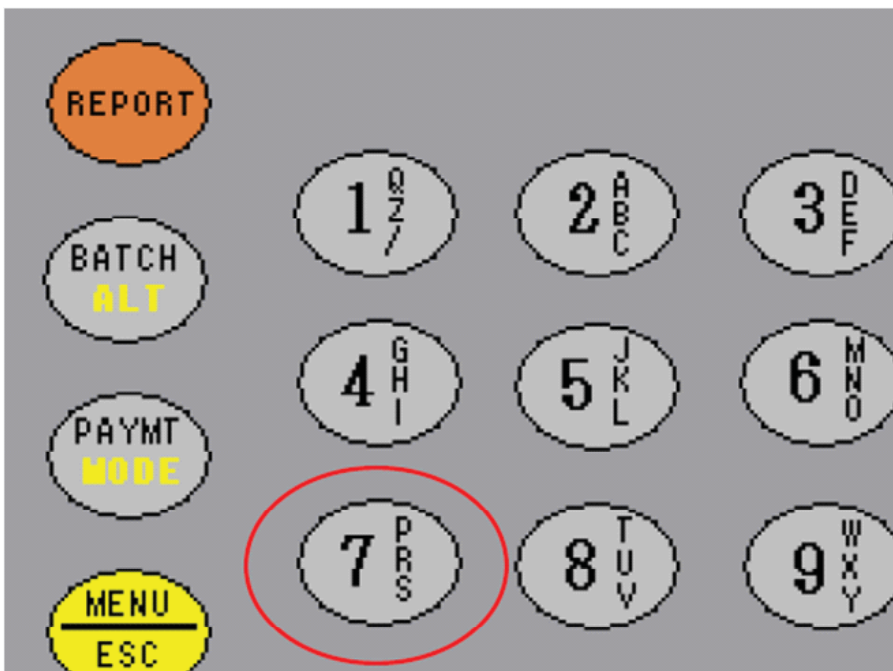


3. Terminal will display “Are You Sure? Enter=YES, Menu=NO.” Press “Enter” for Yes.

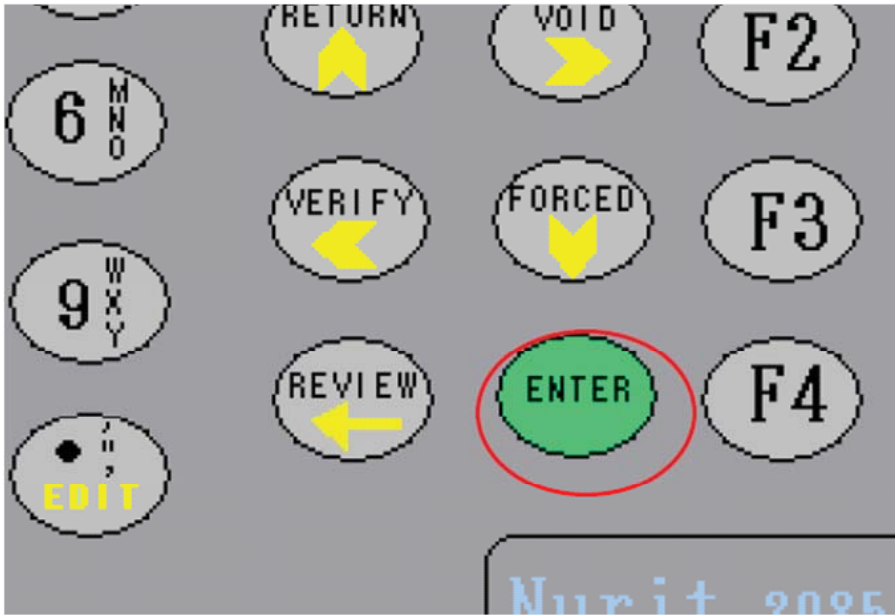

4. The terminal will then verify the dial-out phone number. If 18886101025 is displayed, press “Enter.” If any other numbers appears, please contact the Terminal Helpdesk.

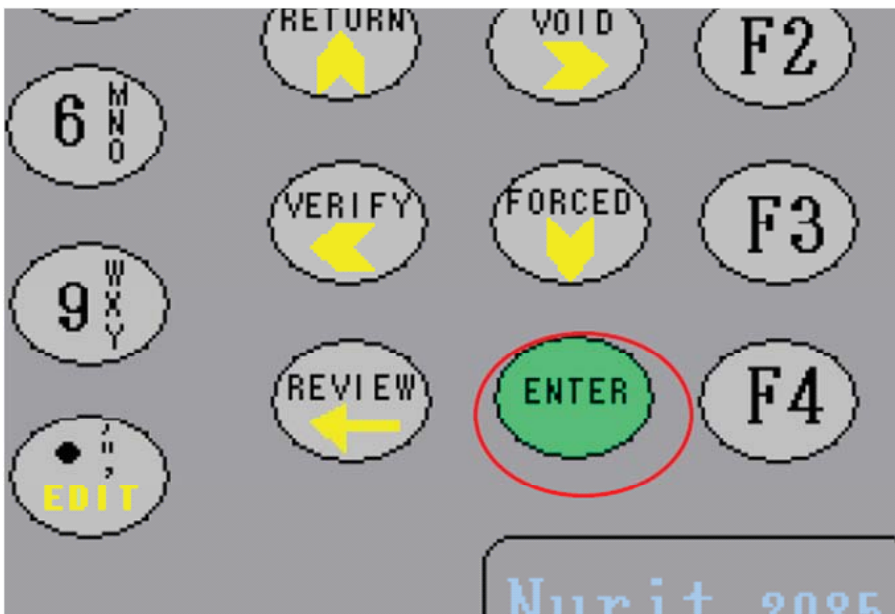

5. Press the “1” key to select “Parameters” from the download menu.

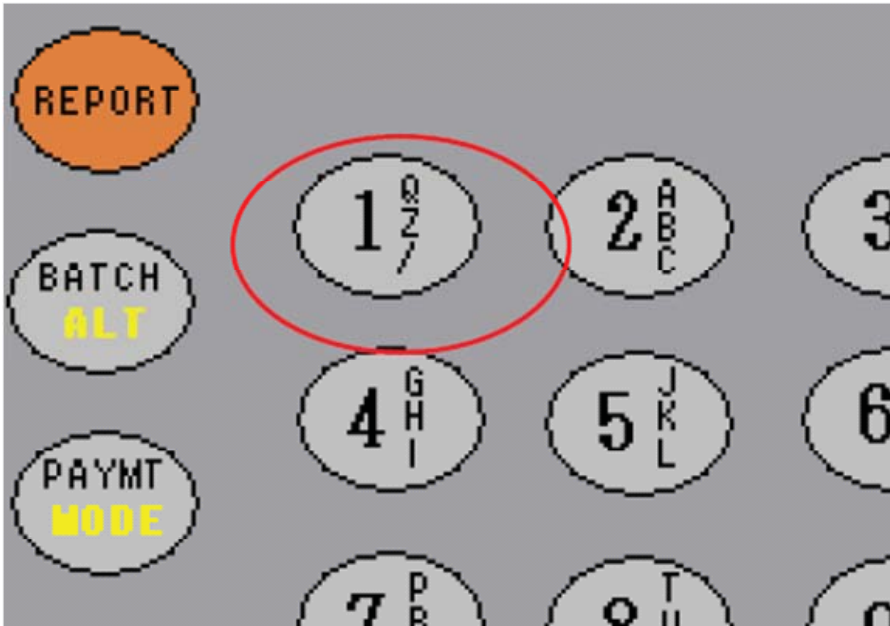

6. The Nurit terminal will dial to run the compliance update. The terminal will display a 1 to 100% count during this 5 minute process. Once completed, the Nurit terminal will reboot and stop on the date/time display. Check your date/time setting. If it is correct press the “Menu/Esc” key to return to the idle screen.



7. If the date/time is incorrect, press the green “Enter” key to re-enter the correct date & time.

